


TRIO



COMPETITOR

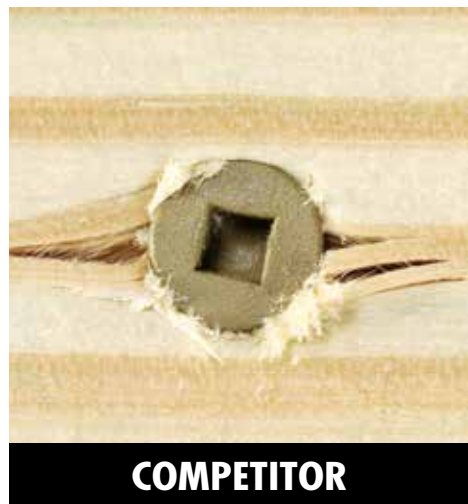

TRIO[®] ULTIMATE DECK SCREW FOR SOFTWOODS

FEATURES

- For softwoods such as cedar, redwood and pressure treated decking
- Strip-out resistant #25 TORX[®] ttap[®] drive system
- ThruPOINT[™] resists splitting
- Corrosion and fade resistant
- Spotter[™] Installation Guide creates consistent board gapping and fastener placement (available only on 350 pc bucket)

DESCRIPTION

TORX[®] ttap[®] drive system offers stick-fit and wobble-free installation, virtually eliminating cam-out. The ThruPOINT[™] bores a pilot hole during installation, eliminating the wedging effect and splitting. Unique fastener engineered to deliver a clean finished look, fade resistance and UV stability ACQ approved. Proprietary plating and coating deliver corrosion resistance 2X better than standard deck screws.

TRIO Spotter[™] Installation Guide. Much more than a lid, it is a tool engineered to increase fastener installation speed and accuracy.

LENGTHS: 2 1/2", 3"

PACKAGING QUANTITIES

75 pc box, 350 pc bucket, 1,050 pc bucket



INSTALLATION PROCEDURE

Use a 0-1800 RPM variable speed corded drill, 18V cordless drill, or impact drill. Install fastener in a continuous drive until head is flush. Install two screws at every joist. The TRIO Ultimate Deck Screw has been designed for three softwood decking applications:

Deck Surface 90° to joist: Position legs of spotter guide to straddle joist.

Push guide flat to deck board surface, and drive TRIO screws through holes marked 90°.

Deck Surface 45° to joist: Position notch on spotter guide legs to sides of joist.

Push guide flat to deck board surface, and drive TRIO screws through holes marked 45°.

Railing balusters: Set first baluster in place at center point of rail, drive the TRIO screws into both top and bottom. Position spotter guide legs against edge of baluster, position next baluster in place, using guide legs on opposite edge of guide for code-compliant baluster spacing.

Using edge of lid as guide, draw a pencil line to show center of baluster, and install the TRIO screws at top and bottom of baluster.

Note: Guide legs act as deck board spacer. Refer to decking manufacturer's installation instructions before installing FastenMaster TRIO Ultimate Deck Screw.

LIFETIME WARRANTY

TRIO is guaranteed for the life of the project. If you are ever dissatisfied with fastener performance, contact us for full reimbursement.



TRIO SKU Selection Guide			
SCREW LENGTH	PACKAGING QTY	COVERAGE	SKU
2 1/2"	75 pc box	20 sq ft	FMTRD212-75
	350 pc bucket	100 sq ft	FMTRD212-350
	1,050 pc bucket	300 sq ft	FMTRD212-1050
3"	75 pc box	20 sq ft	FMTRD003-75
	350 pc bucket	100 sq ft	FMTRD003-350
	1,050 pc bucket	300 sq ft	FMTRD003-1050
TRIO #25 TORX [®] ttap [®] Driver Bits (2 PK)			FMTTAPT25BIT-2PK

**Coverage based on 16" o.c. joist spacing 100 sq ft*



ADDITIONAL RESOURCES



Ask the FastenMaster Installation Video

Our Ask the FastenMaster video series includes installation information for many of our products, including our TRIO Ultimate Deck Screw for the Ultimate Finished Look video. These can be viewed on our website.

For technical support or to place an order: 800-518-3569 or www.FastenMaster.com